
APPROVED TO BE FIG. NONE


CS SUBCLASS

ERAFTE 424 198.1


1/10





1.2 pM/kg/min GLIP





1.2 pM/kg/min GLIP




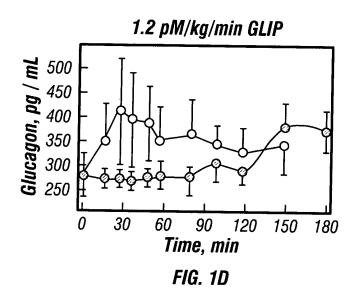











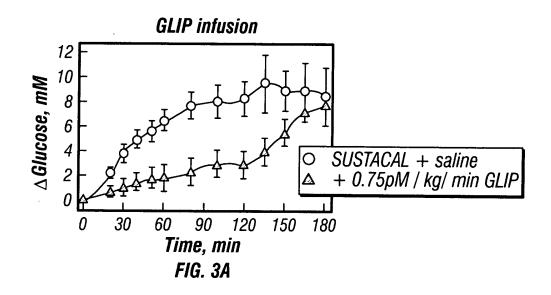


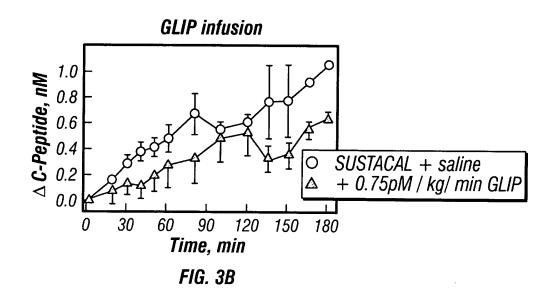












APPROLY 3.0. FIG.


BY SS SUBCLASS


DRAFTS 424 (98.1














237 mg






APPROVIOUS CLFIG.

10/10





7 20 - 60 90 120 150 180 Time, min
FIG. 6F